

New Generation Crushers
HP3 Cone Crushers







HP3 cone crushers

Creative Performance

There's no better choice than a cone crusher when it comes to . . .

- high productivity,
- low operating and wear costs,
- long service life, and high product yield with desired shape and gradation.

Metso leads this market with its high performance HP Series cone crushers for the aggregate and mining markets.

HP (High Performance) Series cone crushers feature a unique combination of crusher speed, throw, and cavity design.

This combination is renowned for providing higher capacity and superior product quality, and having a wider range of application suitability:

- limestone to taconite,
- road ballast to manufactured sand,
- compact portable plant to the largest stationary.

Field-proven HP series cone crushers provide unbeatable performance in secondary, tertiary, and quaternary applications.

They provide the highest capacity, the best product shape, the highest on-spec yield, easy automation, and the greatest possible reliability and flexibility.

The next generation

The HP3 follows successful HP4 and HP5 as the third model of an all-new range of high performance cone crushers, which benefits from the very latest in Metso crushing technology. Its heavy duty design is a tribute to our 70+ years of experience with the Symons cone, known world-over for its rugged construction and application versatility. Labor-saving features such as hydraulic setting adjustment, tramp release and cavity clearing recall the innovative Nordberg Omnicone and first generation of HP crushers.

But the HP3 achieves new heights with unique features that produce the highest reduction ratios, ease of operation and low maintenance requirements. New cone delivers the highest performance and lowest operating costs. Make more product, better product at the same time improving the workplace and helping the environment.

Designed for your needs

Fact. In today's dynamic crushing and screening environment, you adapt and innovate or you fall behind. That's why

Metso listens to its customers, to find out what they need to succeed. To be honest, a lot of you seemed conflicted, wanting a high capacity tertiary/quaternary machine with:

- a small profile,
- tight settings,
- minimized operating costs, and
- the versatility for recrushing.

Metso's research and development team met that challenge with the new HP3. No more conflict. Designed for maximum versatility and hardest applications, it provides maximized productivity while minimizing operating costs.

Why HP3 cone crushers?

- High capacity
- Quality end product shape
- Reduced maintenance down time



Crusher working benefits

Highest performance

The HP3 cone crusher enables you to produce much finer products with fewer crushing stages, thereby lowering your investment and saving energy. How is this possible?

With a combination of optimized speed and large throw, HP3 provides the highest reduction ratios of any current cone crusher. Due to its super-efficient crushing action, the HP3 has the best power utilization per cone diameter. So you save twice with lower kWh per ton of crushed end product and with lower recirculation load. Higher cavity density improves interparticular crushing action for end products with more consistent gradation and superior shape (cubicity).

The new HP3 maintains the proven threaded rotating bowl design. Comparative tests show equalized wear and more consistent setting around the entire circumference of the crushing chamber. Also the use of a newly designed tramp release system, with fixed return point, makes sure that the crusher setting is instantaneously maintained even after passing a piece of tramp iron.

Less downtime

Another way the new HP3 delivers is less downtime and increased operator

confidence. Dual-acting hydraulic tramp release cylinders let the HP3 pass tramp iron that would stall, or damage, many other crushers. If the crusher does stop under load, the dual-acting cylinders provide a large clearing stroke, independent of liner wear, to quickly clear the crushing cavity.

An advanced fastening system for the mantle and bowl liner makes backing material unnecessary, and makes liner changes faster. Thicker liners mean more material to wear. When liners are changed or the crusher is reconfigured, the same hydraulic motors that rotate the bowl for setting adjustment will rotate the bowl completely out of the adjustment ring threads, greatly simplifying liner replacement.


If you pull the head you will find a new fixed counterweight guard that protects the counterweight and seals out dust.

Easy to maintain


Bronze bushings used throughout provide superior load capability in the dusty, high-shock crushing environment. They cost less than rolling element bearings and are easy to replace in the field with normal tools. The HP3 is easy to disassemble. All components are accessible from the top or side. The bowl and head are easily removed; no interference fit to contend with.




High crushing force

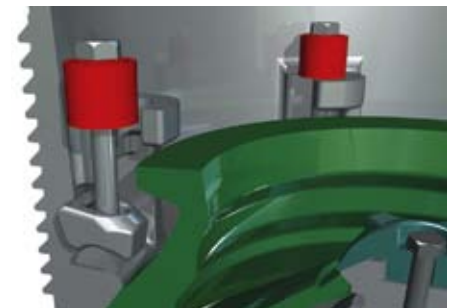

Liner change

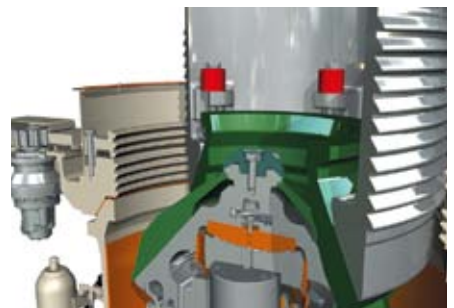

Dismantling of crusher

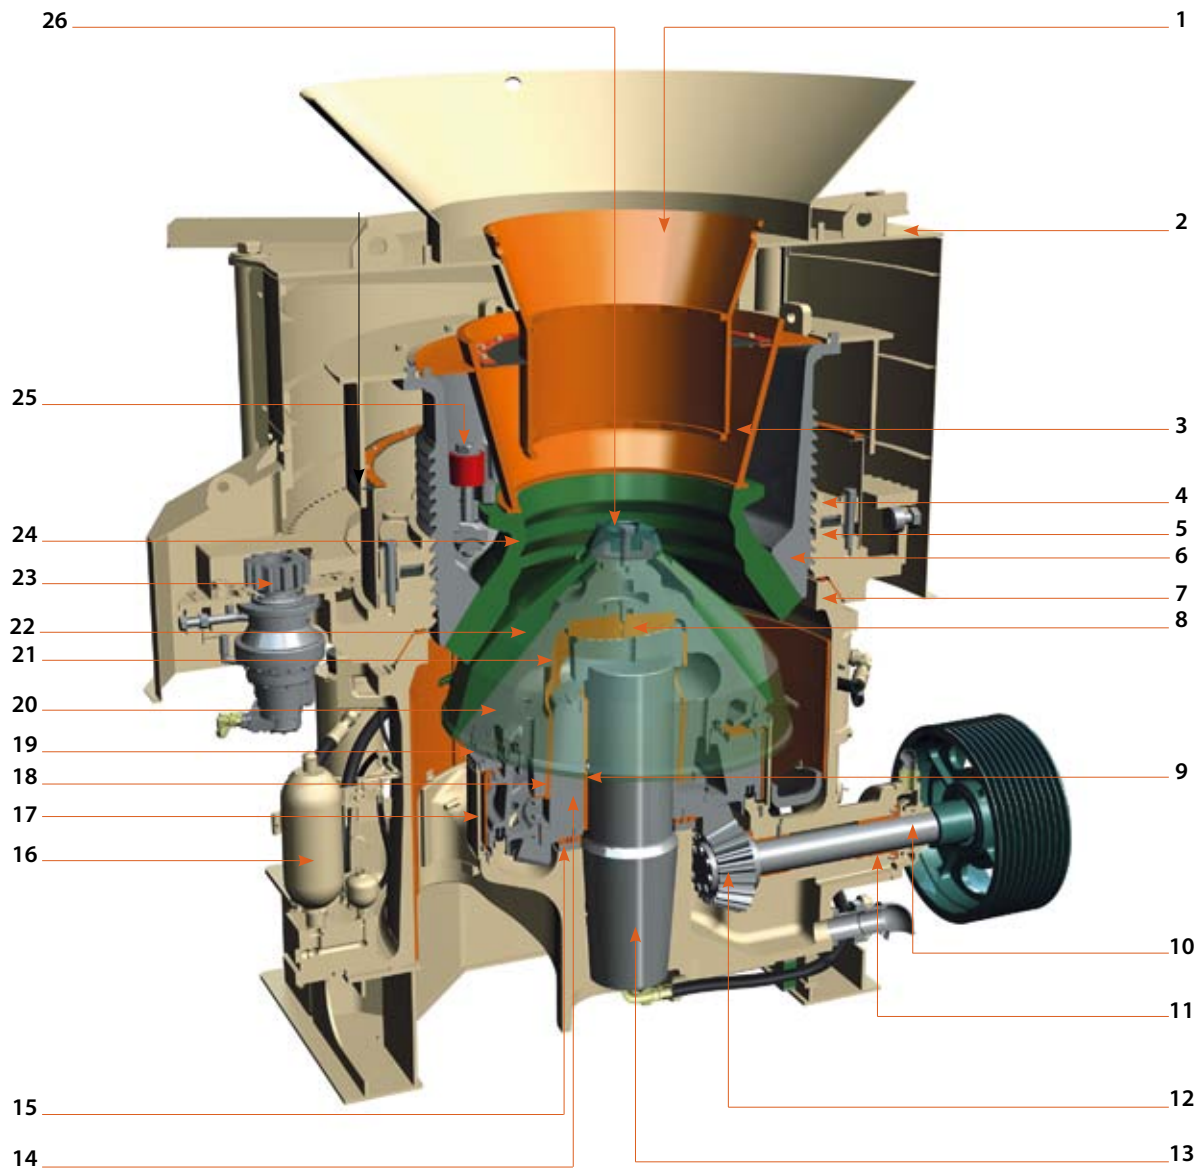

1 - Feed Arrangement
 2 - Safety Shield
 3 - Feed Bowl Hopper
 4 - Clamping Ring
 5 - Adjustment Ring
 6 - Bowl
 7 - Main Frame
 8 - Socket
 9 - Eccentric Bushing

10 - Countershaft
 11 - Countershaft Bushings
 12 - Gear and Pinion
 13 - Main Shaft
 14 - Eccentric
 15 - Eccentric Thrust Bearing
 16 - Tramp Release Assembly
 17 - Counterweight Guard
 18 - Lower Head Bushing

19 - Antispin Device
 20 - Head
 21 - Upper Head Bushing
 22 - Mantle
 23 - Hydraulic Adjustment Motor
 24 - Bowl Liner
 25 - Bowl Liner Fixation
 26 - Cone feed plate

FEATURES & BENEFITS

Versatility

Due to its strength, speed range and ease of converting from coarse to extra fine applications, the HP3 provides application flexibility that was unheard of until now.

- Save stockpile space by recrushing excess or slowmoving products without an intermediate crushing stage.
- Converting from coarse to extra fine application and back again just by changing liners and rpm.
- Liner and rpm combinations go from secondary applications to sand manufacturing.

Asset Protection

The new tramp release design also protects the main frame from uncrushables by smoothing out the impact forces and returns the bowl to its original position after passing tramp iron. Inside, a new fixed guard protects counterweight and seals out dust.

An optional cover around the crusher protects employees from casual contact with adjustment and tramp release mechanisms. It also helps protect the workplace with reduced dust emissions. The environment benefits too from the advanced fastening system for mantle and bowl liner that do not require backing material.



Tramp release

IC7000 Automation


- **IC7000 basic automation:** basic control system with fundamental crusher control features (sequence start/stop, power overload, temperature protection and diagnostics).
- **IC7000 advanced automation:** advanced control system with full range of crusher control features, including crusher setting control, feeder control, power mode, winter mode.



IC7000 automation


Dimensions

HP Model	A	B	C	D
HP3	2 778 mm 109.37"	2 146 mm 84.49"	2 475 mm 97.44"	2 817 mm 110.90"

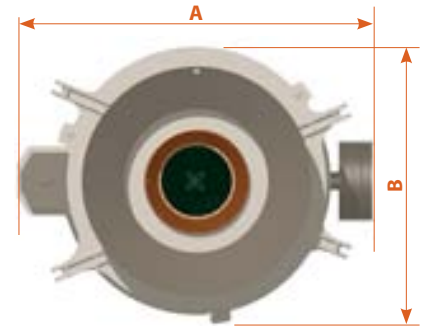

Technical data

HP Model	Nominal feed opening	Motor size up to	Crusher weight	Complete crusher weight*
HP3	220 mm (8.65")	220 kW (300 hp)	13 280 kg (29 277 lbs)	16 446 kg (36 257 lbs)

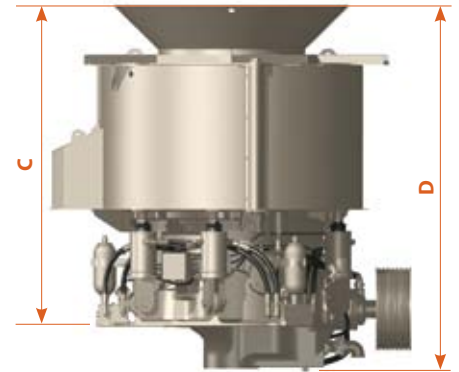

Cavities

HP Model	Cavity	Minimum setting	Feed opening
HP3	Extra Coarse	25 mm (0.99")	200 mm (7.89")
	Coarse	20 mm (0.79)	183 mm (7.20)
	Medium	15 mm (0.59")	156 mm (6.15")
	Fine	11 mm (0.43")	95 mm (3.74")
	Extra Fine	8 mm (0.31")	18 mm (0.78")

* Complete crusher weight: crusher + subframe, motor sub frame, covers, feed and discharge arrangement


Crusher Capacities

The capacity figures given are approximate only and give an idea of what the crusher is able to produce. They apply for open circuits and dry material with a spec. gravity (2.65) of usual Granite. As a crusher is part of a process, its performance depends on crushability and density of the material, proper selection and operation of feeders, conveyors, screens, supporting structure, electric motors, drive components and surge bins. **Contact us for choosing the right machine for your application.**

Closed Side Setting

HP Model	CSS	8 mm (5/16")	10 mm (3/8")	13 mm (1/2")	16 mm (5/8")	19 mm (3/4")	22 mm (7/8")	25 mm (1")	32 mm (1 1/4")	38 mm (1 1/2")	45 mm (1 3/4")
HP3	mtph	94-122	108-147	136-185	164-220	182-241	199-262	210-279	217-307	251-349	279-388
	stph	104-135	119-162	150-204	181-243	200-266	219-289	231-308	239-339	277-385	308-427

Gradation curves*

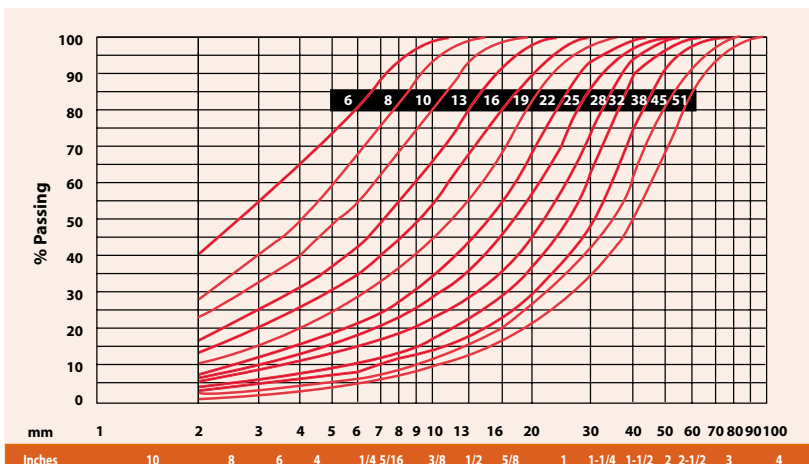

* The gradation and capacities shown are dependant on the feed gradation, the crushing chamber, the material density, the material cleanliness, its moisture and its crushability.

Metso Mining and Construction Technology crushing equipment

Our Nordberg, Barmac and Lokotrack brand ranges:

Unit crushers

- C Series jaw crushers
- Primary gyratory crushers
- GP Series cone crushers
- HP Series cone crushers
- MP Series cone crushers
- NP Series horizontal impact crushers
- B-Series vertical impact crushers
- Laboratory crushers

Mobile equipment

- LT Series mobile crushing plants
- NW Series portable plants

Complete plants

- Complete plants for aggregate production
- Complete plants for recycling

Mining and Construction Technology main contacts

Australia and New Zealand

Metso Minerals (Australia) Ltd
1110 Hay Street
West Perth, WA 6005
Australia
Phone: +61 8 9420 5555
Fax: +61 8 9320 2500

China

Metso Minerals (Beijing) Ltd
19/F, The Exchange Beijing, Tower 4,
China Merchants Centre,
No. 118 Jian Guo Lu Yi Chaoyang District
100022 Beijing,
China
Phone: +86 10 6566 6600
Fax: +86 10 6566 2583

India and Asia-Pacific

Metso Minerals (India) Pvt Ltd
1st Floor, DLF Building No. 10,
Tower A, DLF Cybercity
DLF Phase II,
Gurgaon 122002
India
Phone: +91 124 235 1541
Fax: +91 124 235 1601

Europe, Middle East and Africa

Metso Minerals España, S.A.
C/ Rivas Nº 4
28032 Madrid
Spain
Phone: +34 91 825 5700
Fax: +34 91 825 5740

North and Central America

Metso Minerals Industries Inc.
20965 Crossroads Circle
Waukesha, WI 53186
U.S.A.
Phone: +1 262 717 2500
Fax: +1 262 717 2504

Russia and other CIS countries

ZAO Metso Minerals (CIS)
V.O. Liniya, 70
199178 St. Petersburg
Russia
Phone: +7 812 740 3040
Fax: +7 812 740 5775

South America

Metso Minerals Indústria e Comércio Ltda
Avenida Independência, 2500 - Éden
18087-050 Sorocaba
Brazil
Phone: +55 15 2102 1300
Fax: +55 15 2102 1696



Metso's Mining and Construction Technology

Lokomonkatu 3, P.O. Box 306
33101 Tampere
Finland
Phone: +358 204 84 142
Fax: +358 204 84 143

e-mail: minerals.info.csr@metso.com
www.metso.com/miningandconstruction